


Reversing wheel

Typ: Customised

Construction: Unidirectional, Satellites

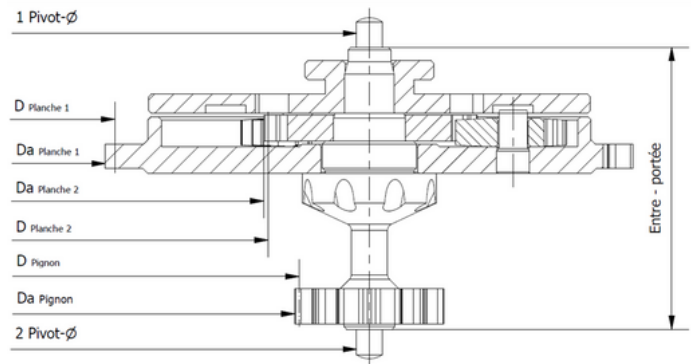

Our high-performance auxiliary reversing wheel guarantees maximum precision and reliability, especially due to the Feller-Roulage and the latest REACH-compliant materials. By applying the satellite principle, the 'Angle-Mort' is significantly reduced, resulting in a more efficient winding of the spring barrel.

Specifications


• 1 Pivot-Ø	Ø0.19	• $Z_{\text{Planche 1}}$	43
• 2 Pivot-Ø	Ø0.19	• $Da_{\text{Planche 1}}$	Ø3.932
• Entre-portée	2.10	• $D_{\text{Planche 1}}$	Ø3.741
• Z_{Pignon}	8	• $Z_{\text{Planche 2}}$	16
• Da_{Pignon}	Ø1.111	• $Da_{\text{Planche 2}}$	Ø1.620
• D_{Pignon}	Ø0.880	• $D_{\text{Planche 2}}$	-

Legend

Z = Number of teeth

Da = Outside diameter

D = Pitch circle diameter



FELLER-SA.CH