
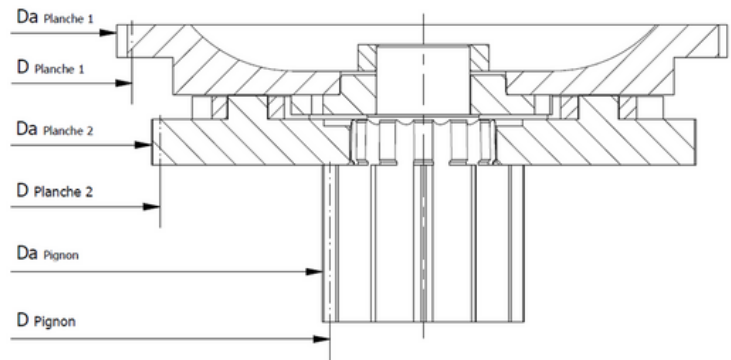


Reversing wheel

Typ: Customised

Construction: Unidirectional, Satellites

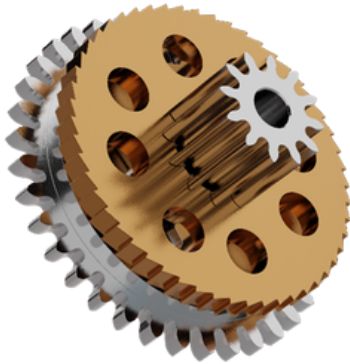

Our high-performance auxiliary reversing wheel guarantees maximum precision and reliability, especially due to the Feller-Roulage and the latest REACH-compliant materials. By applying the satellite principle, the 'Angle-Mort' is significantly reduced, resulting in a more efficient winding of the spring barrel.

Specifications

• 1 Pivot-Ø	-	• $Z_{\text{Planche 1}}$	36
• 2 Pivot-Ø	-	• $Da_{\text{Planche 1}}$	Ø4.657
• Entre-portée	-	• $D_{\text{Planche 1}}$	-
• Z_{Pignon}	12	• $Z_{\text{Planche 2}}$	52
• Da_{Pignon}	Ø1.527	• $Da_{\text{Planche 2}}$	Ø4.140
• D_{Pignon}	Ø1.320	• $D_{\text{Planche 2}}$	-

Legend

Z = Number of teeth

Da = Outside diameter

D = Pitch circle diameter



FELLER-SA.CH