


Reversing wheel

Typ: 2892 ®*Plus

Construction: Bidirectional, Satellites

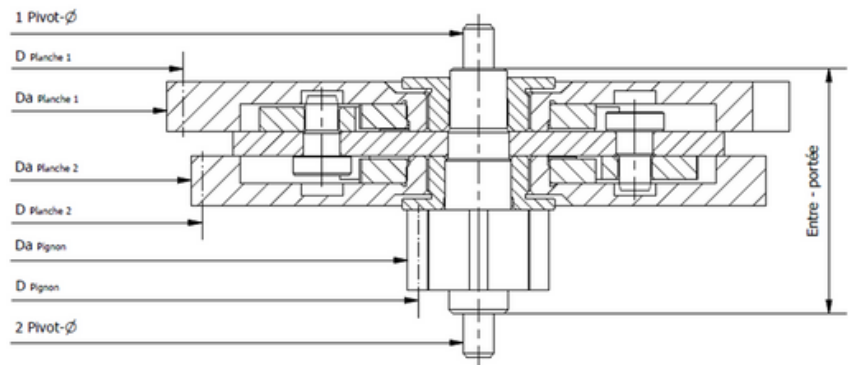

Our high-performance auxiliary reversing wheel guarantees maximum precision and reliability, especially due to the Feller-Roulage and the latest REACH-compliant materials. By applying the satellite principle, the 'Angle-Mort' is significantly reduced, resulting in a more efficient winding of the spring barrel.

Specifications


• 1 Pivot-Ø	Ø0.19	• Z _{Planche 1}	37
• 2 Pivot-Ø	Ø0.19	• Da _{Planche 1}	Ø3.860
• Entre-portée	1.52	• D _{Planche 1}	Ø3.700
• Z _{Pignon}	8	• Z _{Planche 2}	34
• Da _{pignon}	Ø0.877	• Da _{Planche 2}	Ø3.560
• D _{pignon}	Ø0.706	• D _{Planche 2}	Ø3.400

Legend

Z = Number of teeth

Da = Outside diameter

D = Pitch circle diameter



FELLER-SA.CH